



LEDTEC

200W LCF HIGHBAY

TECHNICAL DATA SHEET

The LCF highbay combines reliability, efficiency, and robustness, making it the ideal LED replacement for most industry standard gas discharge lamp-based highbays of up to 400W for heights up to 8 metres. It comes packaged with hook and chain mounts to make the installation process a breeze for your crew and minimises disruptions to your business with minimal to no maintenance requirements.

Areas for Application

- Industrial Workshops
 - Public Spaces
 - Retails Stores
 - Warehouses
 - Sports Halls
 - Indoor Courts
- Manufacturing Facilities



8/94 Forsyth Street O'Connor WA, 6163

+61 (08) 6371 1780

sales@ledtec.com.au

www.ledtec.com.au

TECHNICAL SPECIFICATIONS

Product

Model	LCF 200W
-------	----------

Luminaire Information

Rated Power	200W
Operating Temperature Range	-40° - +50° c
Luminous Flux	26,000lm
Fixture Installation	Chain Mount Hook Mount
Mounted Height	0-30m

Electrical Characteristics

Power Factor	>0.90/230 VAC
Operating Voltage Range	AC 90-305V
Input Current/230V	2.17A/230VAC
Frequency Range	50-60Hz
Driver Type	Mean Well

Optical Characteristics

Correlated Colour Temperature	5000k Standard (Optional 2700K - 6500K)
Colour Rendering Index	80Ra
LED Type	Philips Lumileds LUXEON 3030 SMD
LED Quantity	238pcs
Light Efficacy	125-135lm/w
LED Expected Lifespan	50,000 hrs
Beam Angle	Type B: 90° Type C: 120°

Material & Finish

IP Rating	IP65
IK Impact Rating	IK08
Material Composition (Body)	Aluminium alloy
Material Composition (Driver Box)	Casting Aluminium
Material Composition (Lens)	Stalinite Glass
Material Composition (Bracket)	Hot Rolled Carbon Steel
Material Composition (Cable)	Polyvinyl chloride

Weight & Packaging

Diameter	320mm
Packaging Dimensions	350x350x210mm
Packaged Weight	5.3kg
Cable Length	1.4m


Warranty

Warranty	5 Years
----------	---------

COLOUR TEMPERATURES


WARM WHITE
2700K - 3000K

COOL WHITE
5900K - 6500K

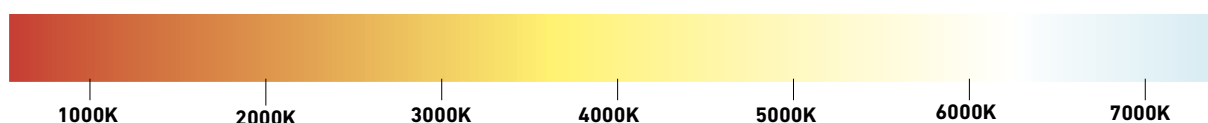


ILLUMINANCE AT DISTANCE


TYPE B: 90°

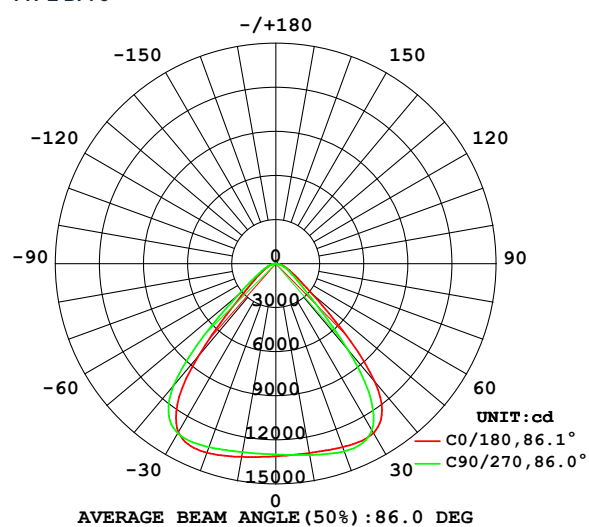


TYPE C: 120°

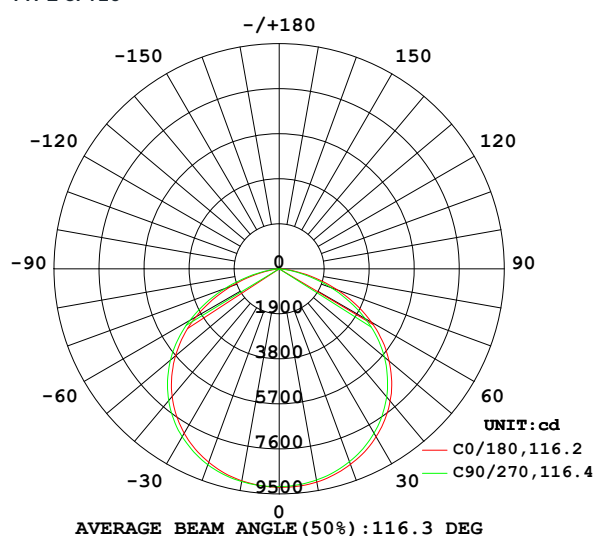

DIMENSIONS

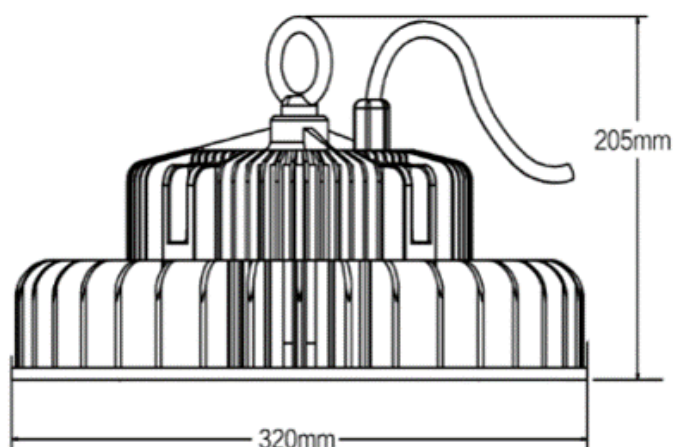


WIRING DIAGRAM

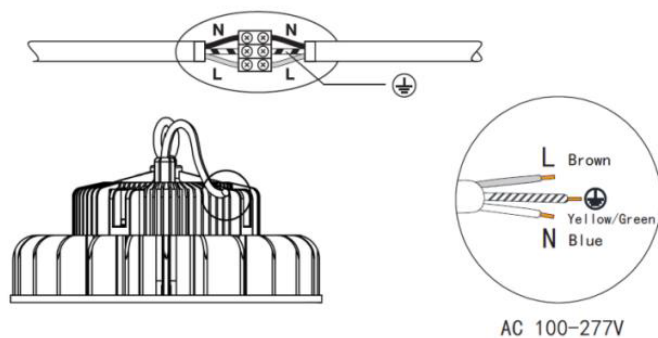


MOUNTING OPTIONS

CHAIN MOUNT

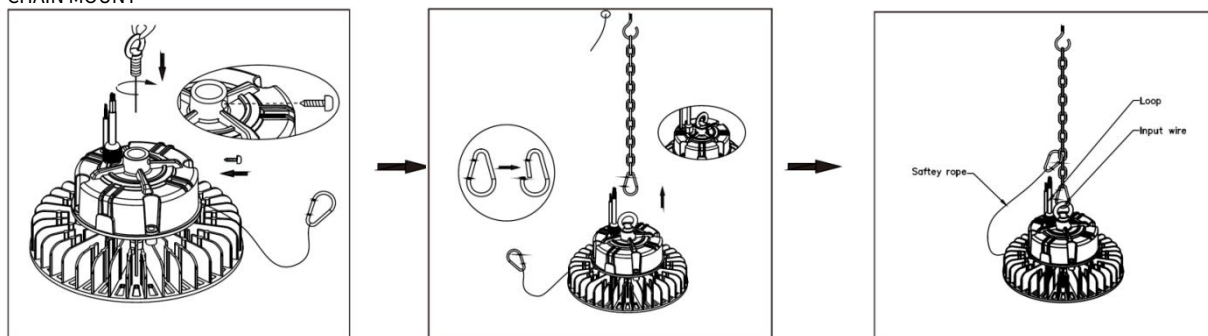

1. Unscrew the screw on top of the driver
2. Screw the circular ring tightly, then lock the circular ring using the screw
3. Fix the highbay fixture with the chain to the ceiling
4. Use the buckle to fix the safety rope with the body and chain
5. Make all wiring connections. If dimming is not required, leave the caps on dimming leads

HOOK MOUNT

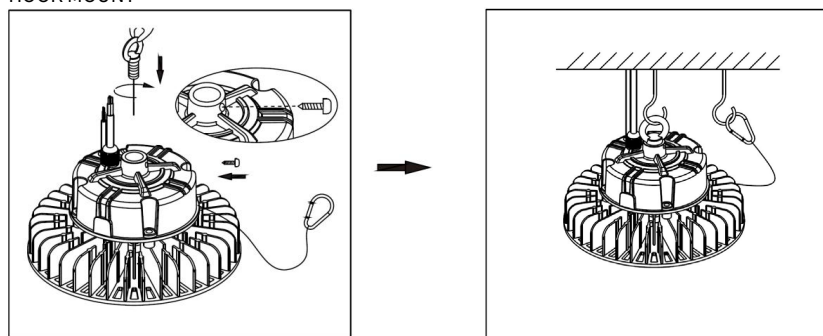

1. Unscrew the screw from the top of the driver
2. Screw the circular ring tightly, then lock with using the screw
3. Carefully hang the LCF highbay into the lifting hook, making sure the hook can carry more than 3 times the weight of the luminaire
4. Use the buckle to fix the safety rope with the body and hook
5. Make all wiring connections. If dimming is not required, leave the caps on the dimming leads

CAUTION: Ensure all power to the lights is switched off before carrying out installation.